

PD8UL

UL Listed Power Distribution Module

Altronix PD8UL UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into eight (8) individually fuse protected outputs.



PD8UL

Specifications

Input

Voltage Range 12VDC or 24VDC, up to 10A or
24VAC or 28VAC, up to 12A

Outputs

Eight (8) fuse protected outputs
2.5A per output max
Total output current should not exceed max current rating of
power supply employed
Fuses are rated @ 3.5A/250V

Indicators (LED)

DC Output Power LED

Agency Listings

UL:

UL294 Access Control
UL603 Burglar Alarm
UL1481 Fire Alarm

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983
Power Supplies for Burglar Alarm Systems ULC-5318-96

Physical and Environmental

Dimensions (L x W x H)

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm).

Product Weight 0.25 lb. (0.11 kg)

Shipping Weight 0.3 lb. (0.14 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)

Storage -20°C to 70°C (-4°F to 158°F)


Relative Humidity 85% +/-5%

Mounting hardware included

Lifetime Warranty

Board Dimensions (L x W x H) and Drawing

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

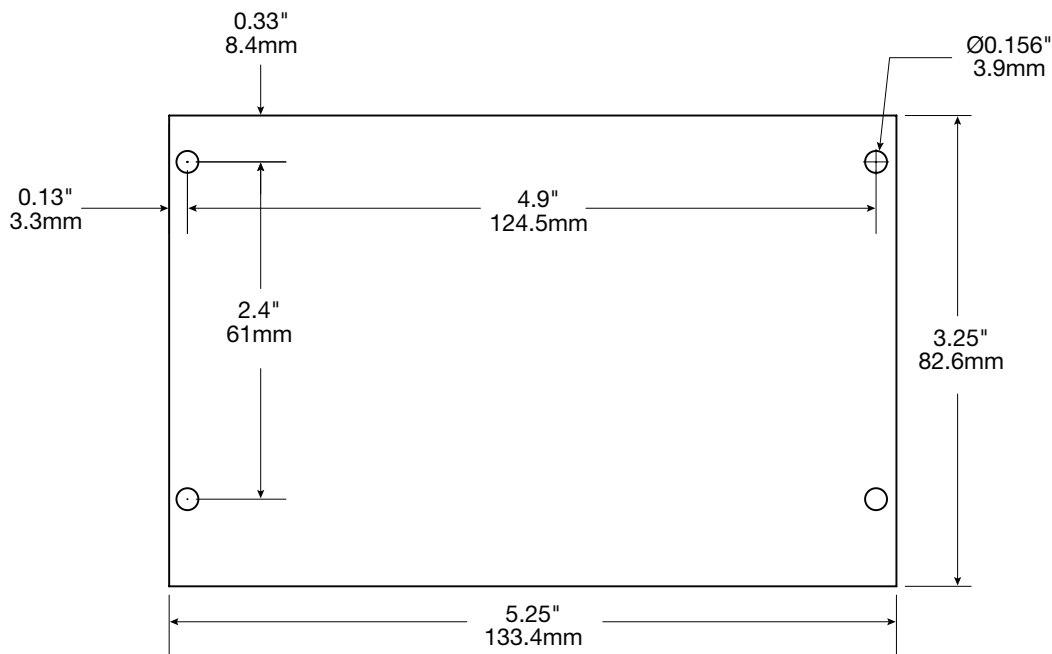

Lifetime Warranty